

ROLLAC OUTDOOR KEY SWITCHES

WIRING INSTRUCTIONS

AVAILABLE HEAVY DUTY OUTDOOR KEY SWITCHES

Momentary Key Switches:

Surface Mounted Key Switch:

8462-SWIT-07-XX

Flush Mounted Key Switch:

8464-SWIT-14-XX

Maintained Key Switches:

Surface Mounted Key Switch:

8461-SWIT-07-XX

Flush Mounted Key Switch: -


8463-SWIT-14-XX



IMPORTANT INFORMATION:

- ☞ the cover cannot be removed without the key.
- ☞ all switches are off in the vertical (center) position.
- ☞ keys can be removed from the momentary key switches only when the key is in the off position.
- ☞ keys can be removed from the maintained key switches in any of the three possible positions (Up, Down, or Off).
- ☞ each key switch can be used to operate only one (1) motor.

WIRING DIAGRAM

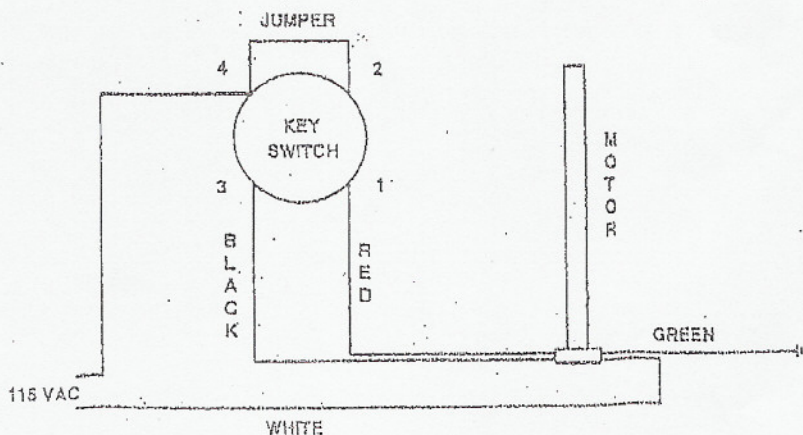

281-485-8004